

GP-T408

36 Cores Floor Distribution Box

Application

- Designed for FTTx projects, providing mechanical protection for fiber systems in multi-dwelling units.
- Serves as a floor-level termination point, offering splicing, storage, and distribution for riser and horizontal cables.



Specifications

Part No.	GP-T408
Dimensions	158mm × 204mm × 54mm
Cable Entry / Exit Ports	1 / 1 In-line Ports
Cable Ports Diameter	Ø15mm
Drop Cable Ports	12 × Ø5mm
Splicing capacity	16 Fusion or mechanical splice or 36 Fibers (9 Fibers/Tray)
Number of Splice tray	4 Trays
Suitable Splitter	1x4 or 1x8 Micro PLC Splitter / Tray
IP Rating	IP43
Mounting	Wall Mount


Features & Benefits




* Slide the cover up to open, and slide it down to lock.




* Splice trays with a book flip design allow for 45° and 90° positioning.

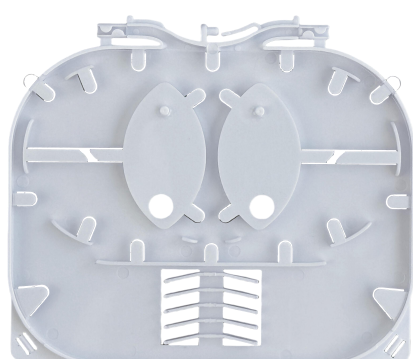

4F/Tray
(Fusion or mechanical splice)

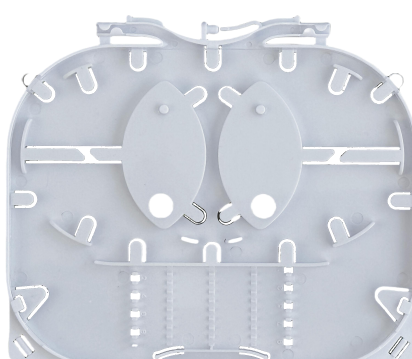

9F/Tray

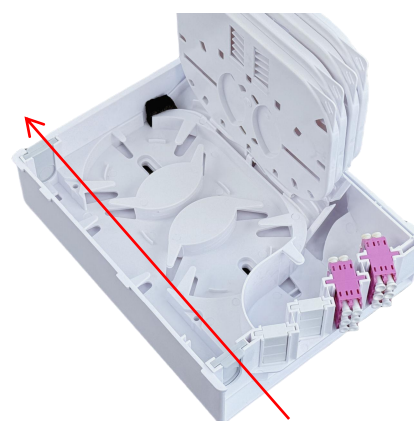

1 / 1 In-line Ports × Ø15mm

Packing List

Part No.	Carton Size	PCS/CTN	G.W.
GP-T408	53x45x33CM	30	17KGS