


## GP-T862

### 2/4-Core FTTH Fiber Optic Wall Outlet

#### Application


- The Fiber Optic Outlet is a compact, wall-mounted termination point designed for indoor FTTH installations in homes, apartments, and offices.
- It supports fusion splicing, SC/APC adaptor termination, and fiber storage for clean, professional finishes.

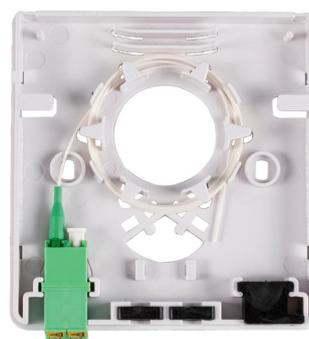

#### Key Features

- Ultra-slim design: 100 × 95 × 16 mm only, discreet wall installation
- Integrated splicing (up to 4 fibers), termination and fiber management
- 4 cable entries: 2 bottom + 2 rear, supports Ø2–5 mm round or 3×2 mm flat drop cable
- Minimum bend radius fully compliant with G.657A/B fibers
- Easy open cover without tools.

#### Dimension Drawing

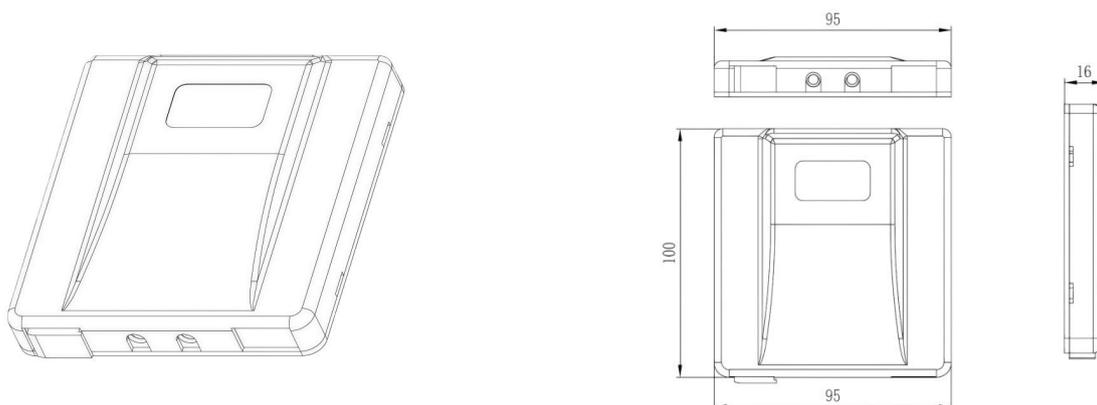

## Specifications

Part No.	GP-T862
Dimensions	100 × 95 × 16 mm
Material	ABS (UL94 V0 Optional)
Color	White (Customizable)
Mounting	Wall Mount
IP Rating	IP20
Cable Entries	4 (2 bottom + 2 rear)
Supported Cable	Ø3 mm Round or 3×2 mm Flat Drop Cable
Storage of Fibers	G.657 Fiber
Adapter Ports	2
Adapter Type	SC or LC Duplex Adapter
Splicing Capacity	2/4 Fibers
Splicing Method	Fusion Splice
Compatible Fiber	G.657A1/A2/B3
Operating Temperature	-40°C to +70°C

## Accessories

Picture	Name	Size	Quantity
	Wall-mounting Kit	/	2 Pairs
	Splice Sleeve	Ø1.2 × 45 mm	2 or 4 PCS

## Ordering Information

Part No.	Description
GP-T862	Empty box (no adapters, no pigtails)
GP-T862-2A	Fully loaded with 2 × SC/APC adapters
GP-T862-2A-2P	Fully loaded with 2 × SC/APC adapters + 2 × SC/APC pigtails (900 µm, 1 m)

- ◆ Other configurations are available upon request. Customization supported.

## Packing List

Part No.	PCS / CTN	G.W. / CTN	Carton Size
GP-T862	250	20 KG	52 × 49 × 40 CM

- ◆ Default packaging: one unit per transparent PE bag (cost-effective, most popular).
- ◆ Individual inner box is available as customized packaging. Extra charge applies.